


TRITURADORA DE RODILLOS CON AJUSTE HIDRÁULICO O AJUSTE MECÁNICO

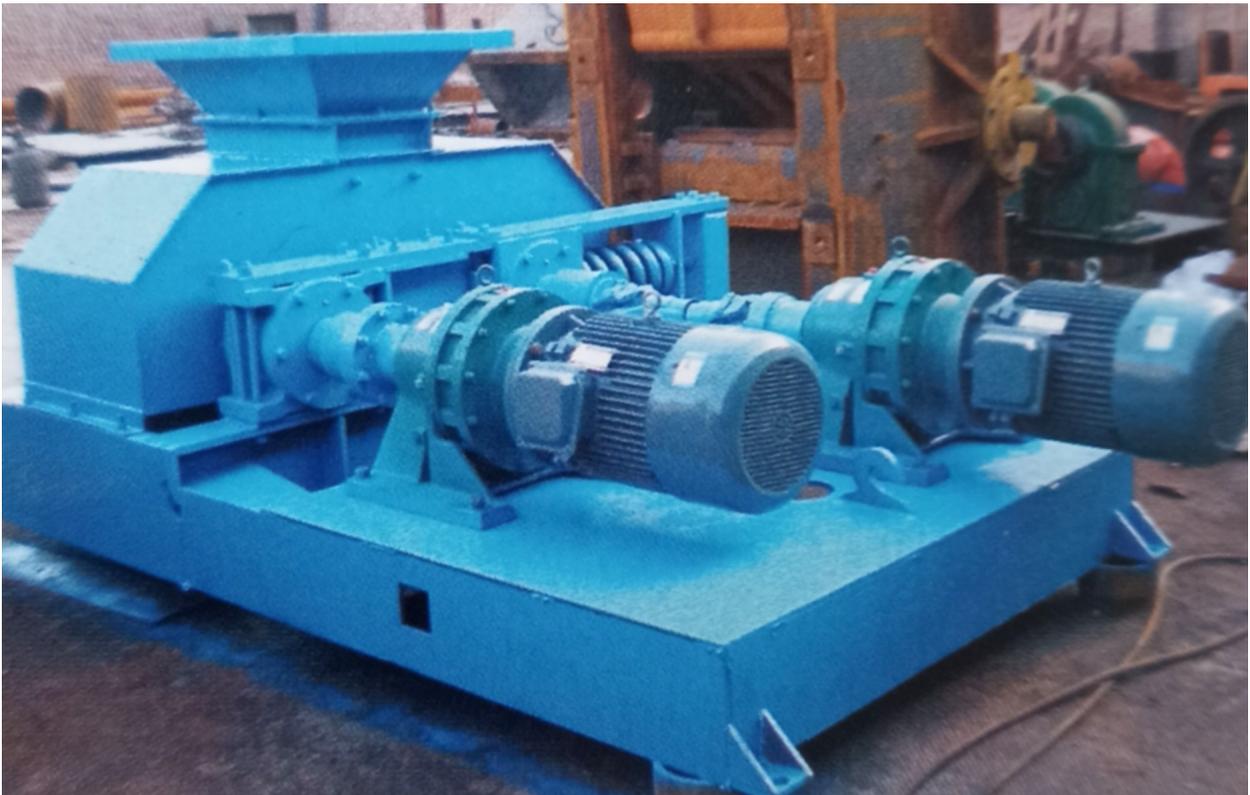

ESPECIFICACIONES TÉCNICAS

Modelo	Tam. de roller (mm)	Tam. de entrada (mm)	Tam. de salida (mm)	Capacidad (T/H)	Potencia (kW)	Velocidad de rodillo (r/min)	Peso (T)
PG400X250	400x250	<25	1-8	5-10	2x5.5	200	1.5
PG610X400	610x400	<40	2-20	13-35	2x15	120	4.5
PG750X500	750x500	<50	2-25	20-50	2x18.5	120	6
PG1000X800	1000x800	<60	3-35	35-70	2x45	100	12
PG1200X800 (Mod- Hid)	1200x800	<60	3-30	70-120	2x75	110	27
PG1500X1000 (Mod- Hid)	1500x1000	<70	3-30	120-200	2x132	110	36.2